



FEEL THE SW DIFFERENCE®

DESIGNED TO ENHANCE WORKER PERFORMANCE.




PowerForm®

PF-95TL

POWDER-FREE ECOTEK BIODEGRADABLE NITRILE EXAMINATION GLOVES*

VERSATILE BIODEGRADABLE 5 MIL SINGLE-USE GLOVE COMBINES MAXIMUM COMFORT AND CONTROL WITH HIGH-QUALITY CONSTRUCTION

- EcoTek® Biodegradable Technology accelerates landfill breakdown without any performance loss*
- Silicone-free for critical environments
- Exceeds 1.5 AQL laboratory standards

PF		PF-95TL			EcoTek
WEIGHT	LENGTH	THICKNESS	FEATURES	COLOR	
 6.5g (large size)	 9.5"	 5.0 mil	EcoTek® Clean Washed Air Inspected	TEAL	



Optimal thickness for durability and tactile sensitivity

Fully textured surface for wet and dry grip

Tear-resistant beaded cuff for easy donning



SafetyMate

www.safetymate.com.au | info@safetymate.com.au | AUS: (07) 5582 6400 | NZ: +64 21 332 877

TECHNICAL DATA



PowerForm®

PF-95TL

**POWDER-FREE ECOTEK BIODEGRADABLE
NITRILE EXAMINATION GLOVES***

PRODUCT DESCRIPTION

SPECIFICATIONS

PRODUCT	PowerForm®	
GRADE	Powder-Free Exam	
MATERIAL	Nitrile	
THICKNESS	FINGER	5.8mil 0.15mm
	PALM	5.0mil 0.13mm
	CUFF	3.9mil 0.10mm
COLOR	Teal	
SURFACE	Fully Textured	
LENGTH	9.5"	242mm
WEIGHT	6.5g	
FIT TYPE	Ambidextrous	
CUFF TYPE	Beaded	
WATERTIGHT AQL	1.5	
ORIGIN COUNTRY	China	

PHYSICAL PROPERTIES


	PRE-AGING	POST-AGING
TENSILE		
STRENGTH:	21 MPA	20 MPA
ELONGATION:	560%	540%

INTEGRATED TECHNOLOGIES

ECOTEK Biodegradable Technology: 92.6% biodegradable in 2.5 years. ASTM D5526-12 test results do not predict future biodegradation.*

100% Air Inspected

Clean Washed

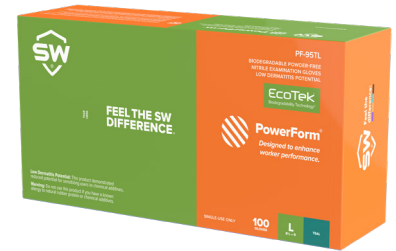


* Specifications based on size Large glove

STANDARDS & CERTIFICATIONS

EN ISO 21420:2020
EN 455-2000-2015
ASTM D6319-19
ASTM D6978-05 (2019)
ASTM F1671-13
ASTM F739-12
Reach EU 1907/2006

EU 2016/425
CAT III Complex Design

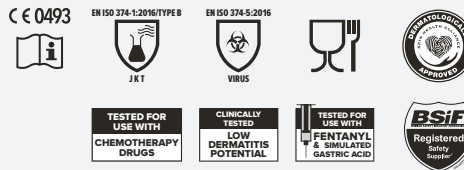

Please visit swsafety.com/symbols for information on standards used on this document.

ORDERING

ITEM NO.	SIZE	PALM WIDTH	PACKAGING
N200362	S 6½ – 7	3.5" 89mm	100 gloves per box 10 boxes per case
N200363	M 7½ – 8	3.8" 98mm	100 gloves per box 10 boxes per case
N200364	L 8½ – 9	4.3" 108mm	100 gloves per box 10 boxes per case
N200365	XL 9½ – 10	4.6" 116mm	100 gloves per box 10 boxes per case
N200366	2XL 10½ – 11	4.9" 124mm	100 gloves per box 10 boxes per case

APPLICATIONS

INDUSTRIAL

Food Handling and Packaging
Janitorial Maintenance
Refinery/Oil

MEDICAL

Chemical Handling

Keep out of sunlight. Store in a cool, dry place.
Keep away from sources of ozone or ignition.



R_N20036X1121

NXG
NEXT GENERATION GLOVES

Riley e

MEC DEX
HI DEXTERITY MECHANICS GLOVES



SafetyMate

www.safetymate.com.au | info@safetymate.com.au | AUS: (07) 5582 6400 | NZ: +64 21 332 877

*Under test method ASTM D5526-12, a standard test method for determining anaerobic biodegradation of plastics in accelerated landfill conditions. Current biodegradation results do not predict future results.